




2011 Home Comfort Portfolio

The ONLY Room Air Conditioner Healthcare Brand with UV-Air Purifier Technology EnergySaver® Portable Air Conditioners, EnergyStar® Dehumidifiers



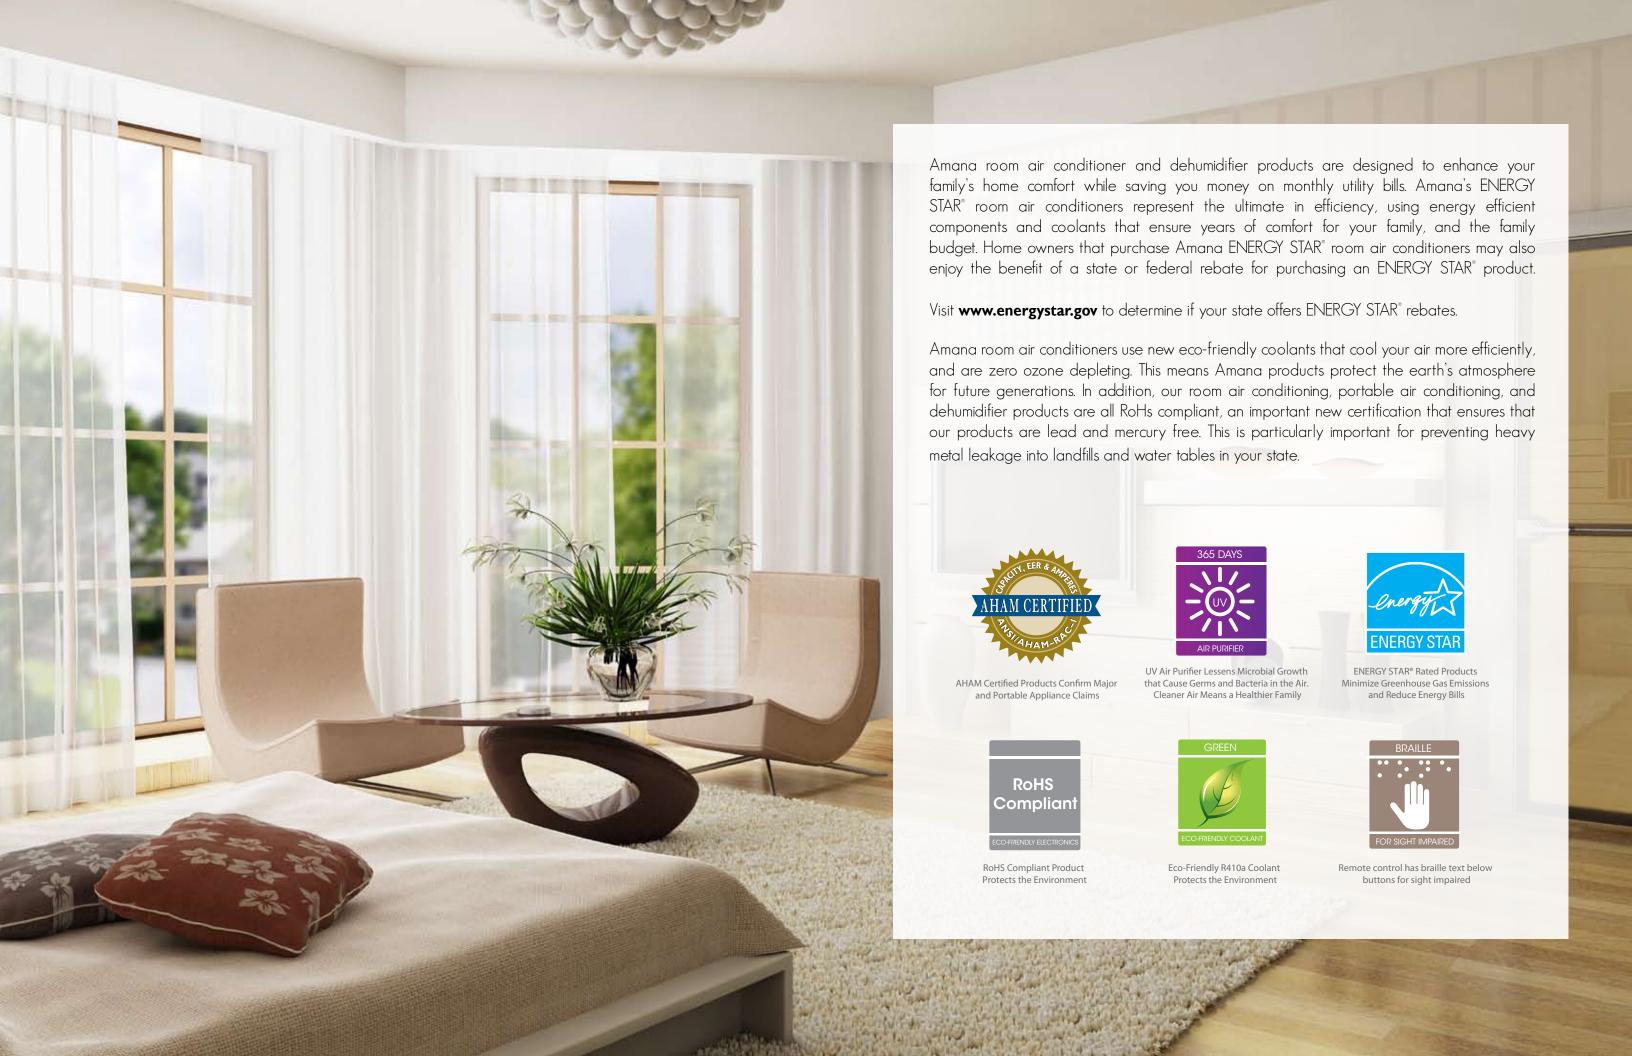



Amana is the only room air conditioner brand with a built-in air purifier that reduces dust, pollen, germs, and odors, making it easier for your family to breath during allergy season and throughout the year.




Amana products feature 3 in one comfort.



HOW IT WORKS:

- Air is purified and deodorized by sunlight-like process.
- Unique photo catalytic air purifier with safe UV light
- UV light activates titanium dioxide (TiO2) filter material
- Active TiO2 filter converts pollutants to carbon dioxide and water

In order to maintain optimum air purifying performance, Amana suggests consumers replace filter Part #AC5200-281 every 12 months. The UV-Air Purifier Filter can be purchased at their Amana dealer.

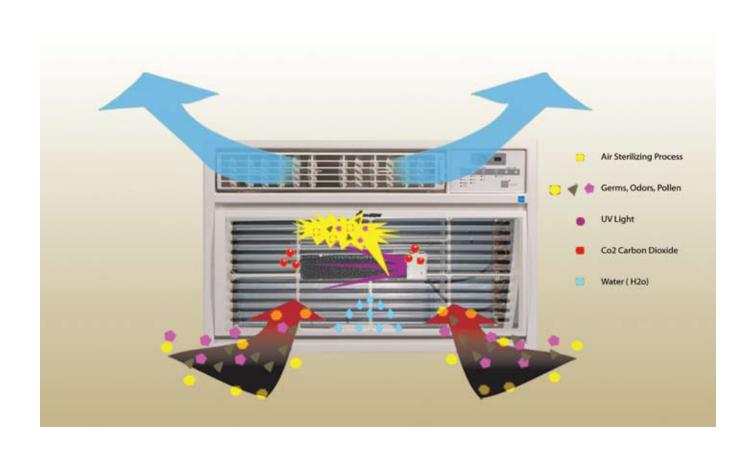





MagnaStore™ Remote:

Amana air conditioning products feature the exclusive MagnaStoreTM remote control that allows consumers to conveniently store their remote on the side of their air conditioning unit. Simply placing the remote against the unit secures the remote magnetically.



Braille Text:

There are over 20 million sight impaired people in North America. Amana is one of the first brands to offer a remote control with Braille text. The MagnaStore™ remote features very subtle raised braille text, offering a barrier free tactile user experience for the sight impaired.



MagnaStore™ Remote Control Portable Air Conditioner



MagnaStore™ Remote Control for Room Air Conditioner.
Magnetically Attaches To Side Of AC For Convenient Storage.

AMA05KF

5,000 BTU Cool, 9.7 EER (Window Only)

- 10 Position Rotary Thermostat
- Eco-Friendly R410a Refrigerant
- EnviroClean[™] Coil for Healthier Air
- 2-Way Air Discharge
- 1.7 Pints Per Hour Dehumidification
- Permanent Mesh Filter
- 51 Decibels Quiet Operation
- Quick-Snap Window Curtain
- Easy-to-Install Mounting KitFixed Chassis

*One Year In-Home Sealed System

ONE YEAR GUARANTEE ONLY NO UV AIR CLEANER

UPC: 6-88057-40119-5
Unit Dimensions (WxDxH): 17-9/32" x 12-27/32" x 11-5/32"
Carton Dimensions (WxDxH): 19-11/16" x 14-15/16" x 12-25/32"
Electrical (volts, amps, watts): 115V, 4.6A, 515W
Unit Weight: 38 lbs.
Shipping Weight: 43.4 lbs.
Container Quantity: 950
Cooling Area: 100-150 sq. ft.





Warranty for all air conditioner models: I year parts & labor, 5 years parts sealed system (Except for AMA05JF) I Year Guarantee On AMA05JF only

Approvals: UL/CUL
Warranty for all dehumidifier models: I year parts, 5 years carry-in sealed system

EEV Certified AHAM for Room Air Conditioning & Dehumidifier







6,000 BTU Cool, 10.7 EER (Window Only) 7,800 BTU Cool, 10.8 EER (Window Only)

- Exclusive UV Air Purifier Technology
- Eco-Friendly R410a Refrigerant
- EnviroClean[™] Coil for Healthier Air
- MagnaStore™ Remote Control with Braille
- 4-Way High Efficiency Air Discharge
- Ultra-Quiet Operation
- 3 Cool Settings, 3 Fan Settings
- Digital Time / Temp Display
- 24 Hour On/Off Timer
- Energy Saver Mode
- 2.4 Pints Per Hour Dehumidification (ACB06KE)
 3.5 Pints Per Hour Dehumidification (ACB08KE)
- 52 Decibels Quiet Operation
- Electrostatic Filter
- Fixed Chassis

ACB06KE UPC: 6-88057-40120-1
Unit Dimensions (WxDxH): 18-1/2" x 15-11/32" x 12-7/16"
Carton Dimensions (WxDxH): 20-1/4" x 17-3/4" x 15"
Electrical (volts, amps, watts): 115V, 5.5A, 560W
Unit Weight: 48.3 lbs.
Shipping Weight: 52.7 lbs.
Container Quantity: 823
Area to be Cooled: 150-250 sq. ft.

ACB08KE UPC: 6-88057-40121-8
Unit Dimensions (WxDxH): 18-1/2" x 15-11/32" x 12-7/16"
Carton Dimensions (WxDxH): 20-1/4" x 17-3/4" x 15"
Electrical (volts, amps, watts): 115V, 6.7A, 720W
Unit Weight: 48.6 lbs.
Shipping Weight: 53 lbs.
Container Quantity: 823
Area to be Cooled: 250-350 sq. ft.

ACDIOKE | ACDI2KE

10,000 BTU Cool, 10.8 EER (Window Only) 12,000 BTU Cool, 10.8 EER (Window Only)

- Exclusive UV Air Purifier Technology
- Eco-Friendly R410a Refrigerant
- EnviroClean[™] Coil for Healthier Air
- MagnaStore™ Remote Control with Braille
- 4-Way High Efficiency Air Discharge
- Ultra-Quiet Operation
- 3 Cool Settings, 3 Fan Settings
- Digital Time / Temp Display
- 24 Hour On/Off Timer
- Energy Saver Mode
- 3.0 Pints Per Hour Dehumidification (ACD10KE)
 3.5 Pints Per Hour Dehumidification (ACD12KE)
- 54 Decibels Quiet Operation
- Permanent Mesh Filter

ACDIOKE UPC: 6-88057-40127-0
Unit Dimensions (WxDxH): 19" x 20-5/32" x 14-3/8"
Carton Dimensions (WxDxH): 21-1/4" x 22" x 17"
Electrical (volts, amps, watts): 115V, 8.5A, 920W
Unit Weight: 82 lbs,
Shipping Weight: 92 lbs.
Container Quantity: 520
Area to be Cooled: 350-450 sq. ft.

ACD12KE UPC: 6-88057-40128-7
Unit Dimensions (WxDxH): 19" x 20-5/32" x 14-3/8"
Carton Dimensions (WxDxH): 21-1/4" x 22" x 17"
Electrical (volts, amps, watts): 115V, 10.5A, 1110W
Unit Weight: 82 lbs.
Shipping Weight: 92 lbs.
Container Quantity: 520
Area to be Cooled: 450-550 sq. ft.

ACEI5KE ACEI8KE

14,500 BTU Cool, 10.7 EER (Window Only) 18,000 BTU Cool, 10.7 EER (Window or Wall Mount)

- Exclusive UV Air Purifier Technology
- Eco-Friendly R410a Refrigerant
- EnviroCleanTM Coil for Healthier Air
- MagnaStore[™] Remote Control with Braille
- 4-Way High Efficiency Air Discharge
- Ultra-Quiet Operation
- 3 Cool Settings, 3 Fan Settings
- Digital Time / Temp Display
- 24 Hour On/Off Timer
- Energy Saver Mode
- 4.0 Pints Per Hour Dehumidification (ACE15KE)
 5.3 Pints Per Hour Dehumidification (ACE18KE)
- 54 Decibels Quiet Operation (ACE15KE)
 57 Decibels Quiet Operation (ACE18KE)
- Permanent Mesh Filter
- Slide Out Chassis

ACE15KE UPC: 6-88057-40122-5

Unit Dimensions (WxDxH): 24-3/8" x 25-3/8" x 16-3/4" Carton Dimensions (WxDxH): 27-1/8" x 28-3/4" x 20-7/8" Electrical (volts, amps, watts): 115V, 11.8A, 1350W Unit Weight: 103 lbs.
Shipping Weight: 117 lbs.
Container Quantity: 255
Area to be Cooled: 550-700 sq. ft.

ACE18KE UPC: 6-88057-40123-2

Unit Dimensions (WxDxH): 26-9/16" x 25-21/32" x 18-21/32" Carton Dimensions (WxDxH): 27-1/8" x 28-3/4" x 20-7/8" Electrical (volts, amps, watts): 230V, 7.6A, 1690W Unit Weight: 129 lbs.
Shipping Weight: 148.4 lbs.
Container Quantity: 255
Area to be Cooled: 700-1000 sq. ft.

ACE24KE

24,000 BTU Cool, 9.4 EER (Window or Wall Mount)

- Exclusive UV Air Purifier Technology
- Eco-Friendly R410a Refrigerant
- EnviroClean[™] Coil for Healthier Air
- MagnaStore™ Remote Control with Braille
- 4-Way High Efficiency Air Discharge
- Ultra-Quiet Operation
- 3 Cool Settings, 3 Fan Settings
- Digital Time / Temp Display
- 24 Hour On/Off Timer
- Energy Saver Mode
- 7.8 Pints Per Hour Dehumidification
- 58 Decibels Quiet Operation
- Permanent Mesh Filter

ACE24KE UPC: 6-88057-40124-9

Unit Dimensions (WxDxH): 26-9/16" x 25-21/32" x 18-21/32" Carton Dimensions (WxDxH): 29-13/16" x 29" x 22-3/8" Electrical (volts, amps, watts): 230V, 11.1A, 2500W Unit Weight: 138 lbs.

Shipping Weight: 152 lbs.
Container Quantity: 192
Area to be Cooled: 1000-1500 sq. ft.





















(A) DEHUMIDIFIER

AHK12J AHK18J AHK24I

12,000 BTU Cool, 10.000 BTU Heat 9.8 EER

18,000 BTU Cool, 16.000 BTU Heat 9.7 EER

23,800 BTU Cool. 16.000 BTU Heat 8.5 EER

- Eco-Friendly R410a Refrigerant
- EnviroClean™ Coil for Healthier Air
- MagnaStore™ Remote Control
- 4-Way High Efficiency Air Discharge
- Ultra-Ouiet Operation
- 3 Cool Settings, 3 Fan Settings
- Digital Time / Temp Display
- 24 Hour On/Off Timer
- Energy Saver Mode
- 2.0 Pints per Hour Dehumidification (AHK12)) 4.5 Pints per Hour Dehumidification (AHK181) 5.7 Pints per Hour Dehumidification (AHK24))
- Permanent Mesh Filter
- 53 Decibels Quiet Operation (AHK12)) 55 Decibels Quiet Operation (AHK18)) 56 Decibels Quiet Operation (AHK24))
- Electronic Controls
- Command Sweep Function
- Quick Snap Window Curtain

AHK12J UPC: 6-88057-34987-9

Unit Dimensions (WxDxH): 26-3/8" x 26-13/16" x 17-1/2" Carton Dimensions (WxDxH): 31-1/2" x 30-1/8" x 20-7/8"

Cool: 220V, 5,4/6.0A,1220/1200W Heat: 13,4/12,0A, 3080/2500W

Shipping Weight: 108.9 lbs.

Unit Dimensions (WxDxH): 26-3/8" x 26-13/16" x 17-1/2"

Carton Dimensions (WxDxH): 31-1/2" x 30-1/8" x 20-7/8"

Electrical (volts, amps, watts):

Cool: 220V, 5.4/6.0A,1220/1200W Heat: 13.4/12.0A, 3080/2500W

AHK24J UPC: 6-88057-34989-3

Unit Dimensions (WxDxH): 26-3/8" x 26-13/16" x 17-1/2"

Electrical (volts, amps, watts):

Cool: 220V, 5.4/6.0A,1220/1200W Heat: 13.4/12.0A, 3080/2500W

Unit Weight: 143 lbs.

Shipping Weight: 159.3 lbs.

Electrical (volts, amps, watts):

Unit Weight: 94.6 lbs.

Container Quantity: 221

Area to be Cooled: 450-550 sq. ft.

AHK181 UPC: 6-88057-34988-6

Unit Weight: 116.6 lbs.

Shipping Weight: 132.9 lbs.

Container Quantity: 221

Area to be Cooled: 700-1000 sq. ft.

Carton Dimensions (WxDxH): 31-1/2" x 30-1/8" x 20-7/8"

Container Quantity: 221

Area to be Cooled: 1000-1500 sq. ft.

ACWK08|R | ACWK10|R

ENERGY STAR® THRU WALL SERIES FITS ALL WALL SERIES EXCEPT FRIGIDAIRE

> B m --

8,000 BTU Cool, 9.4 EER 10.000 BTU Cool, 9.4 EER

- Exclusive UV Air Purifier Technology
- Eco-Friendly R410a Refrigerant
- EnviroClean[™] Coil for Healthier Air
- MagnaStore[™] Remote Control
- 4-Way High Efficiency Air Discharge
- Ultra-Quiet Operation
- 3 Cool Settings, 3 Fan Settings
- Digital Time / Temp Display
- 24 Hour On/Off Timer
- Energy Saver Mode
- 1.9 Pints per Hour Dehumidification (ACWK09/R)
- 2.3 Pints per Hour Dehumidification (ACWK10JR)
- 55-59 Decibels Quiet Operation (ACWK09|R)
- 55-60 Decibels Quiet Operation (ACWK10JR)
- Auto Restart
- Optional Wall Sleeve AKTTWS

ACWK08JR UPC: 6-88057-40125-6

Unit Dimensions (WxDxH): 24" x 16-23/32" x 14-5/8"

Carton Dimensions (WxDxH): 27-5/8" x 26" x 18-1/4"

Electrical (volts, amps, watts):

Cool: 220V, 5.4/6.0A,1220/1200W Heat: 13.4/12.0A, 3080/2500W

Unit Weight: 94.6 lbs. Shipping Weight: 108.9 lbs.

Container Quantity: 221

Area to be Cooled: 250-350 sq. ft.

ACWKIOIR UPC: 6-88057-34991-6

Unit Dimensions (WxDxH): 24" x 16-23/32" x 14-5/8"

Carton Dimensions (WxDxH): 27-5/8" x 26" x 18-1/4"

Electrical (volts, amps, watts):

Cool: 220V, 5.4/6.0A,1220/1200W Heat: 13.4/12.0A, 3080/2500W Unit Weight: 116.6 lbs. Shipping Weight: 132.9 lbs.

Container Quantity: 221

Area to be Cooled: 350-450 sq. ft.

ACWK10|V | ACWK12|V

10,800 BTU Cool, 9.4 EER 11,600 BTU Cool, 9.4 EER

- Exclusive UV Air Purifier Technology
- Eco-Friendly R410a Refrigerant
- EnviroClean[™] Coil for Healthier Air
- MagnaStore™ Remote Control
- 4-Way High Efficiency Air Discharge
- Ultra-Quiet Operation
- 3 Cool Settings, 3 Fan Settings
- Digital Time / Temp Display
- 24 Hour On/Off Timer
- Energy Saver Mode
- 3.6 Pints per Hour Dehumidification
- 55-60 Decibels Quiet Operation
- Auto Restart
- Optional Wall Sleeve AKTTWS

ACWKIOJV UPC: 6-88057-34992-3

Unit Dimensions (WxDxH): 24" x 16-23/32" x 14-5/8"

Carton Dimensions (WxDxH): 27-5/8" x 26" x 18-1/4"

Electrical (volts, amps, watts):

Cool: 220V, 5.4/6.0A,1220/1200W Heat: 13.4/12,0A, 3080/2500W

Unit Weight: 94.6 lbs. Shipping Weight: 108.9 lbs.

Container Quantity: 221

Area to be Cooled: 350-450 sq. ft.

ACWK12JV UPC: 6-88057-34993-0

Unit Dimensions (WxDxH): 24" x 16-23/32" x 14-5/8" Carton Dimensions (WxDxH): 27-5/8" x 26" x 18-1/4"

Electrical (volts, amps, watts):

Cool: 220V, 5.4/6.0A,1220/1200W Heat: 13.4/12.0A, 3080/2500W


Unit Weight: 116.6 lbs.

Shipping Weight: 132.9 lbs. Container Quantity: 221

Area to be Cooled: 450-550 sq. ft.



PATENTED AUTO-EVAPORATION TECHNOLOGY ELIMINATES THE NEED TO EMPTY WATER TRAY

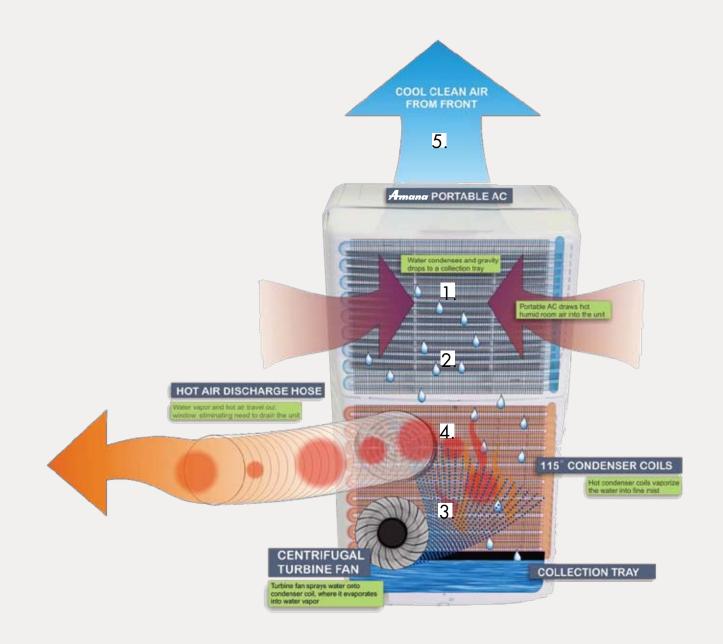

How Does It Work?

- I. Warm humid air is drawn into portable ac in back.
- 2. Humidity is pulled from the air, and drops as water from the coils to water collection tray.
- 3. A turbine fan sweeps the collected water up onto the hot condenser coils, where it evaporates into a water vapor.
- 4. The water vapor is sucked out the rear hot air discharge hose, and passes out the homeowners window, where it simply drifts away.
- 5. Cool air is discharged into the homeowners room interiors.









8,000 BTU* Cool

- Eco-Friendly R410a Refrigerant
- MagnaStore™ Remote Control with Braille
- 3 Cool Settings, 3 Fan Settings
- 24 Hour On/Off Timer
- EasyClean™ Membrane Switches
- EasyViewTM Digital LED Display
- Dehumidification Function
- Slide Out Filter
- Thermostat Control
- Multi-Position Room Air Discharge
- Single Hot Air Discharge Hose
- Exhaust Window Kit
- 5' Exhaust Hose
- UL Listed
- * At ASHRAE 128

AP08JR UPC: 6-88057-40007-5

Unit Dimensions (WxDxH): 19-1/10" x 13-1/4" x 24-1/10" Carton Dimensions (WxDxH): 25-1/5" x 14-9/10" x 25-1/5" Electrical (volts, amps, watts): 120V, 8.2A, 900W Unit Weight: 56.1 lbs.
Shipping Weight: 68.1 lbs.
Container Quantity: 404

APN10J | APN12J

10,000 BTU* Cool 12,000 BTU* Cool

- Eco-Friendly R410a Refrigerant
- MagnaStore™ Remote Control with Braille
- 3 Cool Settings, 3 Fan Settings
- 24 Hour On/Off Timer
- EasyClean™ Membrane Switches
- EasyViewTM Digital LED Display
- Dehumidification Function
- Slide Out Filter
- Thermostat Control
- Multi-Position Room Air Discharge
- Single Hot Air Discharge Hose
- Exhaust Window Kit
- 5' Exhaust Hose
- UL Listed
- * At ASHRAE 128

APNIOJ UPC: 6-88057-40009-9

Unit Dimensions (WxDxH): 17-7/10" x 15-1/4" x 29-2/5"
Carton Dimensions (WxDxH): 18-7/10" x 17-7/10" x 34-1/4"
Electrical (volts, amps, watts): 120V, 9.5A, 1050W
Unit Weight: 67.1 lbs.
Shipping Weight: 78.1 lbs.
Container Quantity: 371

APN 12J UPC: 6-88057-40010-5

Unit Dimensions (WxDxH): 17-1/5" x 15-1/5" x 29-2/5"
Carton Dimensions (WxDxH): 18-7/10" x 17-7/10" x 34-1/4"
Electrical (volts, amps, watts): 120V, 10.8A, 12,000W
Unit Weight: 68.2
Shipping Weight: 79.2 lbs.
Container Quantity: 371

APN 12HJ

12,000 BTU* Cool, 11,500 BTU Heat

- Eco-Friendly R410a Refrigerant
- MagnaStore™ Remote Control with Braille
- 3 Cool Settings, 3 Fan Settings
- 24 Hour On/Off Timer
- EasyClean™ Membrane Switches
- EasyViewTM Digital LED Display
- Dehumidification Function
- Slide Out Filter
- Thermostat Control
- Multi-Position Room Air Discharge
- Single Hot Air Discharge Hose
- Exhaust Window Kit
- 5' Exhaust Hose
- UL Listed
- * At ASHRAE 128

APN 12HJ UPC: 6-88057-40011-2

Unit Dimensions (WxDxH): 17-7/10" x 15-1/4" x 29-2/5"
Carton Dimensions (WxDxH): 18-7/10" x 17-7/10" x 34-1/4"
Electrical (volts, amps, watts):
Cool: 120V, 10.8A,12,000W Heat: 10.5A,1180W
Unit Weight:
Shipping Weight: 79.9 lbs.
Container Quantity: 371

APN 14K

14,000 BTU* Cool

#

- Eco-Friendly R410a Refrigerant
- MagnaStore™ Remote Control with Braille
- 3 Cool Settings, 3 Fan Settings
- 24 Hour On/Off Timer
- EasyClean™ Membrane Switches
- EasyViewTM Digital LED Display
- Dehumidification Function
- Slide Out Filter
- Thermostat Control
- Multi-Position Room Air Discharge
- Single Hot Air Discharge Hose
- Exhaust Window Kit
- 5' Exhaust Hose
- UL Listed
- * At ASHRAE 128

APN 14K UPC: 6-88057-40126-3

Unit Dimensions (WxDxH): 20-1/10" x 16-7/10" x 33-3/5" Carton Dimensions (WxDxH): 21-2/5" x 18-1/2" x 43-1/10" Electrical (volts, amps, watts): 120V, 11.5A, 13,000W Unit Weight:

Shipping Weight: 94.6 lbs. Container Quantity: 214











D930E

30 Pint Capacity, Electronic Control

- Eco-Friendly R410a Refrigerant
- LED Electronic Controls, LED Display
- Low Temperature Operation down to 41°F
- CETL US
- "Trouble-Free" Drain Connect
- Side Water Bucket With Water Level Window
- 8 Pint Bucket
- Pre-Drilled Drain Connect with 3.3' Water Hose Included
- Automatic Humidistat Control
- Auto Shut-Off
- Auto Defrost
- Bucket-Full Indicator Light
- Easy-Roll Casters (DIY Installation)
- Easy-Access Washable Filter

D930E UPC: 6-88057-40118-8 Unit Dimensions (WxDxH): 13" x 13" x 20-7/10" Carton Dimensions (WxDxH): 25-1/5" x 14-9/10" x 25-1/5" Electrical (volts, amps, watts): 120V, 8.2A, 900W Unit Weight: 56.1 lbs. Shipping Weight: 68.1 lbs. Container Quantity: 404

D945E

45 Pint Capacity, Electronic Control

- Eco-Friendly R410a Refrigerant
- Electronic Controls, LCD Display
- Low Temperature Operation down to 41°F
- "Trouble-Free" Drain Connect
- Front Water Bucket for Easy Access
- 12 Pint Bucket
- Pre-Drilled Drain Connect with 3.3' Water Hose Included
- Automatic Humidistat Control
- Auto Shut-Off, Auto Defrost
- Bucket-Full Indicator Light
- Easy-Roll Casters (DIY Installation)
- Easy-Access Washable Filter

D945E UPC: 6-88057-34859-9 Unit Dimensions (WxDxH): 13-1/4" x 9-1/2" x 21-1/2" Carton Dimensions (WxDxH): 15-9/16" x 11-9/16" x 20-13/16" Electrical (volts, amps, watts): 115V, 5.1A, 550W Unit Weight: 31.2 lbs. Shipping Weight: 34.0 lbs. Container Quantity: 1193

D965E

65 Pint Capacity, Electronic Control

- Eco-Friendly R410a Refrigerant
- Electronic Controls, LCD Display
- Low Temperature Operation down to 38°F
- "Trouble-Free" Drain Connect
- Front Water Bucket for Easy Access
- 18 Pint Bucket
- Pre-Drilled Drain Connect with 3.3' Water Hose included
- Automatic Humidistat Control
- Auto Shut-Off
- Auto Defrost
- Bucket-Full Indicator Light
- Easy-Roll Casters (Factory Installed)
- Easy-Access Washable Filter

D965E UPC: 6-88057-34860-5

Unit Dimensions (WxDxH): 15" x 12" x 23-1/4" Carton Dimensions (WxDxH): 16-9/16" x 14" x 25-7/8" Electrical (volts, amps, watts): 115V, 7.0A, 770W Unit Weight: 41.0 lbs. Shipping Weight: 44.59 lbs. Container Quantity: 710

D974E

74 Pint Capacity, Electronic Control

- Eco-Friendly R410a Refrigerant
- Electronic Controls, LCD Display
- Drain Pump Allows PVC Pipe
- Low Temperature Operation down to 38°F
- Front Water Bucket for Easy Access
- 18 Pint Bucket
- Pre-Drilled Drain Connect with 3.3' Water Hose included
- Automatic Humidistat Control
- Auto Shut-Off
- Auto Defrost
- Bucket-Full Indicator Light
- Easy-Roll Casters (Factory Installed)
- Easy-Access Washable Filter

D974E UPC: 6-88057-34862-9

Unit Dimensions (WxDxH): 15" x 12" x 23-1/4" Carton Dimensions (WxDxH): 16-9/16" x 14" x 25-7/8" Electrical (volts, amps, watts): 115V, 7.5A, 820W Unit Weight: 41.0 lbs. Shipping Weight: 47.6 lbs.

> AIR CONDITIONER AIR PURIFIER (A) DEHUMIDIFIER

Container Quantity: 710












Choosing a Proper Room Air Conditioner



Measure:

Measure the height and width of the window opening, and make sure the dimensions on the AC packaging fit the window.





Check:

Check out the nearby outlet and make sure to match the unit to that outlet.









115 volt 15 Amp

230/208 volt 15 Amp


230/208 vo**l**t 20 Amp

230/208 volt 30 Amp



Calculate:

To calculate the area of the room to be cooled, multiply of the length of the room by its width to determine square footage.





Match:

Use the below chart to determine the proper room air conditioner size. (Second floor rooms, kitchens and other locations may require more BTUs.)

BTUs	Sq.Ft.	Sq.M
5,000	100-150	9-14
6,000	151-250	14-23
8,000	251-350	23-33
10,000	351-450	33-42
12,000	451-550	42-51
15,000	551-700	51-65
18,000	701-1,000	65-93
24,000	1,001-1,500	93-139

Special Considerations:

- •Heavily shaded room: reduce capacity by 10%
- •Kitchen to be cooled: add 4,000 BTUs
- •Room above a ceiling: add 2,000 BTUs
- •More than 2 people in a room: add 600 BTUs per person

Choosing a Proper Dehumidifier



Measure:

Measure the area in square feet that needs to be dehumidified. Then determine the moisture condition of the space.




Dehumidifier Selection:

Select the right size dehumidifier with the chart below.

3 Step

Selection Guide:

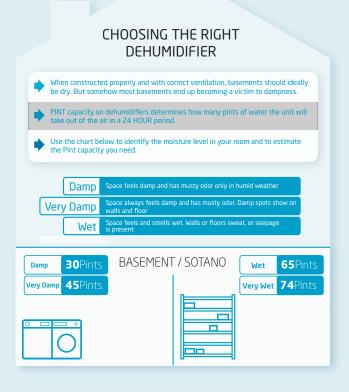



© 2011 Haier America Trading, LLC. All Rights Reserved. 101346

Amana is a registered trademark of Maytag Corporation or its related companies. Manufactured under license by Haier America, New York, New York.

1356 Broadway New York, NY 10018

Sales: 212.594.3330 x3212 Service: 1.888.842.2440